# SAM ANGLE HEAD HOLDER

小鋼炮銑削頭

Coolant feed through spindle

Coolant dowel pin

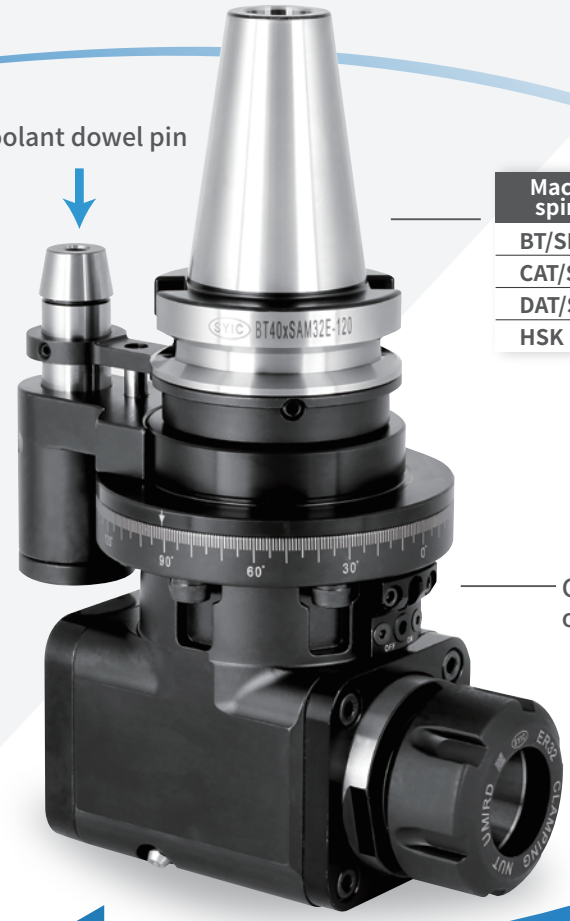


| Machine spindle |
| --- |
| BT/SBT |
| CAT/SCAT |
| DAT/SDAT |
| HSK |

Coolant through cutting tools or through coolant holes

| Output |
| --- |
| ER16/20/25/32 |
| SK310/13/16 |
| PRO-E16/20/25/32 |



## Japanese-made Bearing

Precision: P4

## Ground Gear

JIS B1704 : 1978 : 2

- Max. revolution: 4,000rpm.
- Max. torque: 20N-m.
- Max. coolant pressure: 7 kgf/cm$^2$ (100PSI).
- ATC is available for all angle head series.

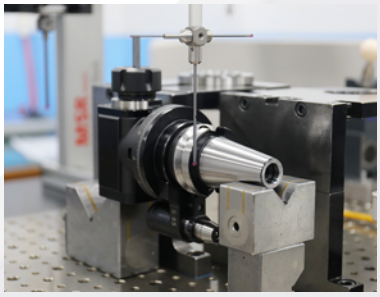

Circular runout: ≦20μm
Angularity: ±8μm

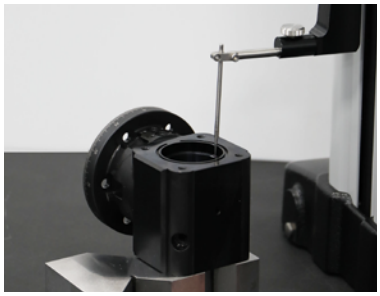

Measuring precision

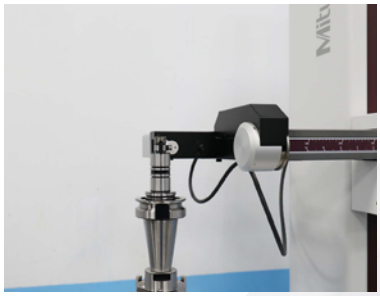

Roundness: 2μm

Taper tolerance: <AT3

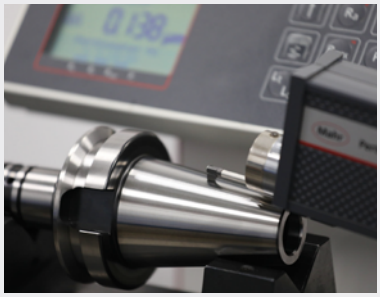

Surface roughness: Ra<0.25μm

心源工業股份有限公司
SHIN-YAIN INDUSTRIAL CO., LTD.

43644 台中市清水區菁埔路198號
NO.198, Jingpu Rd., Qingshui Dist,
Taichung City 436, Taiwan

Tel: +886-4-26237575
Fax: +886-4-26237676
E-mail: sales@syic.com

www.syic.com