



2024-09

## TR9CM For Drilling Machines

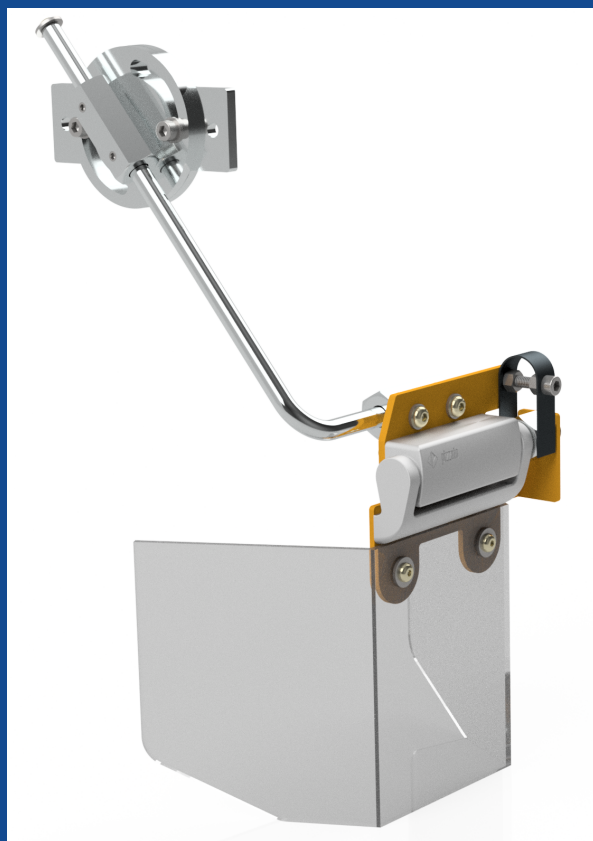

Complete with polycarbonate screen 4mm thick. The screen ensures non-contact with the rotating spindle and protects the operator from projections of chips and coolant. The fixing rod has an up/down adjustment with a semicircle shaped slot system that can be locked in all positions. The screen opens vertically in 3 positions, to have more space on the work surface and facilitates operations when there are a number of in-line drilling machines. The vertical opening of the screen is regulated by a safety micro switch built into the hinge, tamper proof.

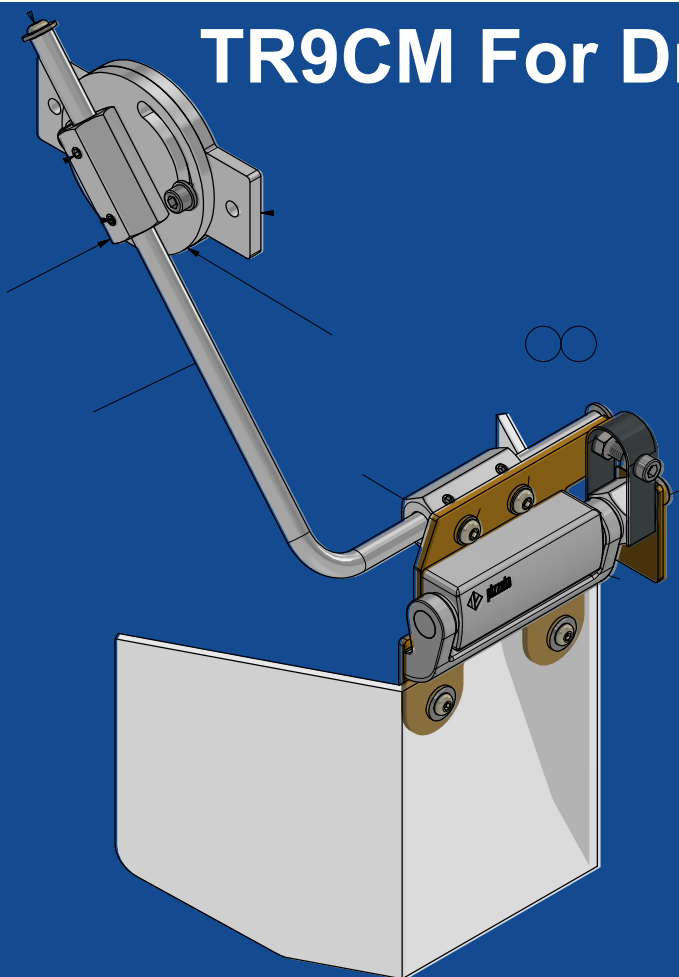

**Production and Sales Dept.**

Via. A Colombo 176 - 21055 Gorla Minore VA - Italy

+39 0331 465727 - [info.repar2@gmail.com](mailto:info.repar2@gmail.com)

**Export Dept.**

+39 340 7331938 - [exportoffice@repar2.com](mailto:exportoffice@repar2.com)

[www.repar2.com](http://www.repar2.com)

*for more information*



+393386795584

Immagini indicative con finalità descrittiva, i prodotti possono subire modifiche in relazione alla disponibilità  
**Indicative images for descriptive purposes, the products may undergo changes in relation to availability**