


SINCE 1970

Repar2

MACHINE GUARDS

CE UK
CA

2024-09

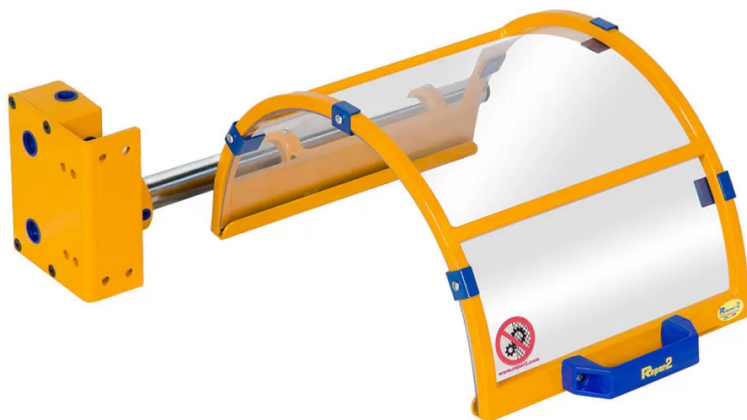

Safety Guards for Turning Machines

TF

Polycarbonate safety guard for lathe chuck, polycarbonate screen, steel frame and safety microswitch. All support units are provided with an adjustable clutch.

Weight: 5 Kg ca.



LLS system



TC

Rear Side Fitting

Mobile and swivelling safety guard to be fitted on the longitudinal carriage of the lathe. Steel frame with polycarbonate screen. Protection of operator against chips and coolant. Available either with or without cooling system and microswitch system. To be fitted on the rear side. Possibility to include Led Lamp 24V(LLS system)-AC/DC IP67-40.000h-outer tube Acrylic-Fast connector with cab 5m

Weight: 5 - 7,5 - 9 Kg ca.



SINCE 1970
Repar2
MACHINE GUARDS

Production and Sales Dept.

Via, A Colombo 176 - 21055 Gorla Minore VA - Italy

+39 0331 465727 - info.repar2@gmail.com

Export Dept.

+39 340 7331938 - exportoffice@repar2.com

www.repar2.com

for more information



+393386795584

Immagini indicative con finalità descrittiva, i prodotti possono subire modifiche in relazione alla disponibilità
Indicative images for descriptive purposes, the products may undergo changes in relation to availability