QuickE

Electric Screwdriver SLOKY

Li-ion Battery | CE | USB CHARGE | LED | MAG 500g | 300RPM Max.

Kit Contents:

0-TPK-ETS-16K-3.0

Handle

QuickE

Adapters

Nm	0.6	0.9	1.2	1.4	2.0	3.0
In-lb	5.3	8.0	10.6	12.4	17.7	26.6

Bits

50mm						
	TX6	TX7	TX8	TX9	TX10	TX15
	6IP	7IP	8IP	9IP	10IP	15IP
	H1.5		H2.0		H2.5	H3.0

0-TPK-ETS-16K-5.0

Handle

QuickE

Adapters

Nm	0.9	1.2	1.4	2.0	3.0	5.0
In-lb	8.0	10.6	12.4	17.7	26.6	44.3

Bits

50mm						
	TX7	TX8	TX9	TX10	TX15	TX20
	7IP	8IP	9IP	10IP	15IP	20IP
		H2.0		H2.5	H3.0	H4.0

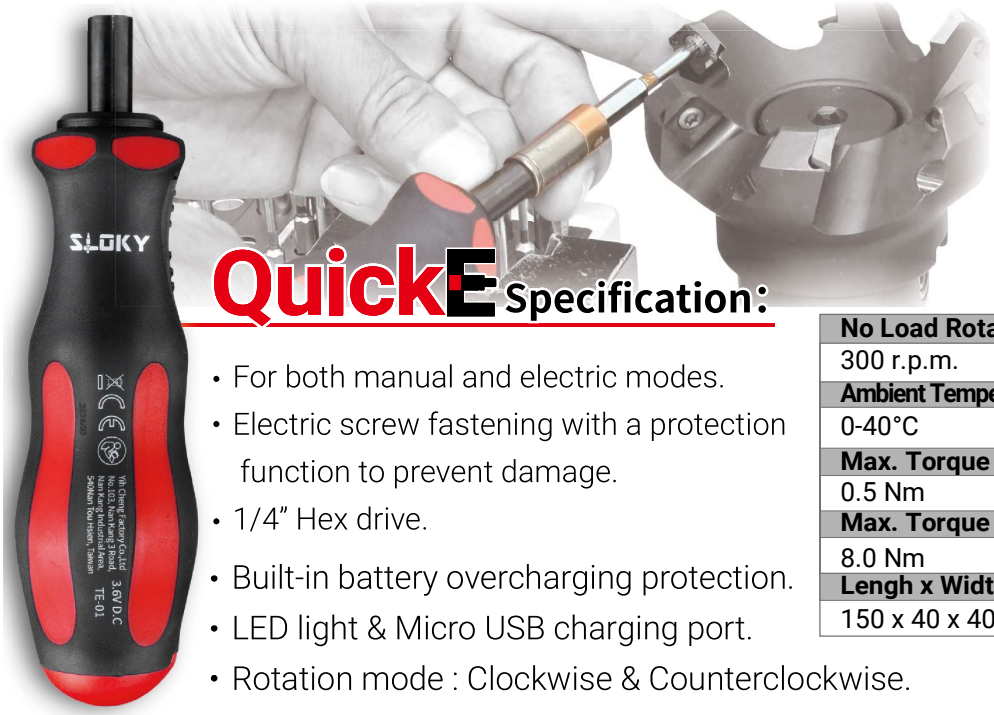

SLOKY

QuickE Specification:

- For both manual and electric modes.
- Electric screw fastening with a protection function to prevent damage.
- 1/4" Hex drive.
- Built-in battery overcharging protection.
- LED light & Micro USB charging port.
- Rotation mode : Clockwise & Counterclockwise.

No Load RotationSpeed (max.)	300 r.p.m.
Ambient Temperature for charging	0-40°C
Max. Torque in Electric Mode	0.5 Nm
Max. Torque in Manual Mode	8.0 Nm
Lengh x Width x Height	150 x 40 x 40 mm

Drive Size	1/4" Hex (6.35 mm)
Charging Method	Micro USB 5V 1A
Battery Capacity	1.5 Ah
Battery Type	Lithium-ion
Battery Voltage	3.6V
Weight	186 g

Scan for user manual

Why Torque Control is important?

Increased tool life of fasteners. Deliver right tightening force to precise parts, no more over tightening. Enhance the function of both tightened parts and connected parts. Allows any user to deliver precision torque control, SOP is built.Apply for various applications.